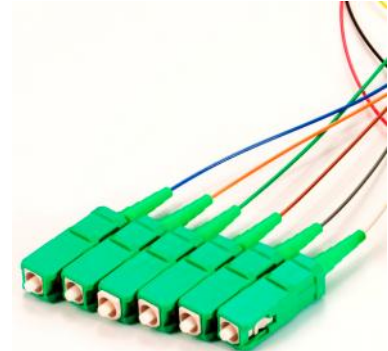# 6, 8, and 12 Pack Fiber Pigtails

Description

Montclair 6, 8 and 12 pack fiber pigtail assemblies, available with or without LGX® adapter plates, provide fiber expansion to your existing rack and wall-mount LGX® compatible panels.
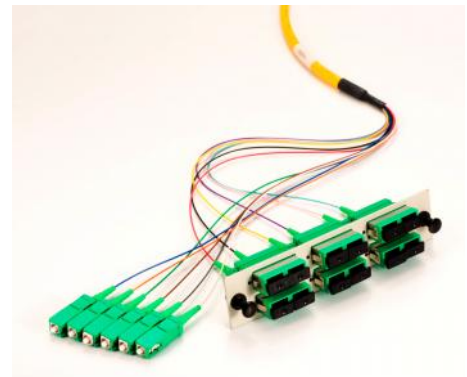
Each 900um tight-buffer color-coded (TIA-598A) fiber pigtail pack is thoroughly tested for quality assurance. Fiber pigtail packs are available in a variety of adapter and connector types.

Features

⟩ Convenient, easy, and cost-effective approach for installing 6, 8 and 12 count fiber pigtails to existing rack and wall-mount LGX® cabinets

⟩ Color-coded 900um tight-buffer fibers (TIA-598A) within mesh-routing provide added protection and allow for trouble-free fiber routing from panels to splice trays

⟩ Available with LGX® compatible snap-in adapter plates in 6, 8, and 12 fiber pigtail packs

⟩ Factory terminated and tested through adapters to ensure low loss

⟩ Telcordia GR-326 compliant cable assemblies

⟩ Singlemode and multimode fiber options

⟩ Available in the following adapter and connector types:
FC/UPC, FC/APC, LC/UPC, LC/APC, SC/UPC, SC/APC, ST/UPC

⟩ Black or beige adapter plate color options

6 pack SC/APC fiber pigtails

12 pack SC/APC fiber pigtails

Fiber color code guide (per TIA-598A requirements):

6 pack fiber pigtails:

Fiber No.	Fiber color
1	Blue
2	Orange
3	Green
4	Brown
5	Slate
6	White

8 pack fiber pigtails:

Fiber No.	Fiber color
1	Blue
2	Orange
3	Green
4	Brown
5	Slate
6	White
7	Red
8	Black

12 pack fiber pigtails:

Fiber No.	Fiber color
1	Blue
2	Orange
3	Green
4	Brown
5	Slate
6	White
7	Red
8	Black
9	Yellow
10	Violet
11	Rose
12	Aqua

MONTCLAIR FIBER OPTICS, INC.

6, 8, and 12 Pack Fiber Pigtails

Ordering information

M C A - S - <u>1</u> - <u>2</u> / P L - <u>3</u> [<u>4</u>] - <u>5</u> - <u>6</u>

1. Fiber Mode:	
S	Singlemode
M	Multimode 62.5um
1	Multimode 50um OM1
2	Multimode 50um OM2
3	Multimode 50um OM3
4	Multimode 50um OM4

2. Adapter / Connector Type:	
AFC	FC/APC
FC	FC/UPC
ALC	LC/APC
LC	LC/UPC
ASC	SC/APC
SC	SC/UPC
ST	ST/UPC

3. Fiber Pigtail Length (meters):	
1	1 meter
2	2 meter
3	3 meter

4. Fiber Type:	
9	900um tight-buffer
L	250um ribbon + 900um

5. Fiber Count:
6
8
12

6. Adapter Plate:	
AP	Adapter plate (with adapters)
00	Fiber pigtails only (no adapter plate)

900um Tight-Buffer

250um ribbon + 900um Tight-Buffer